


Existing Substrate

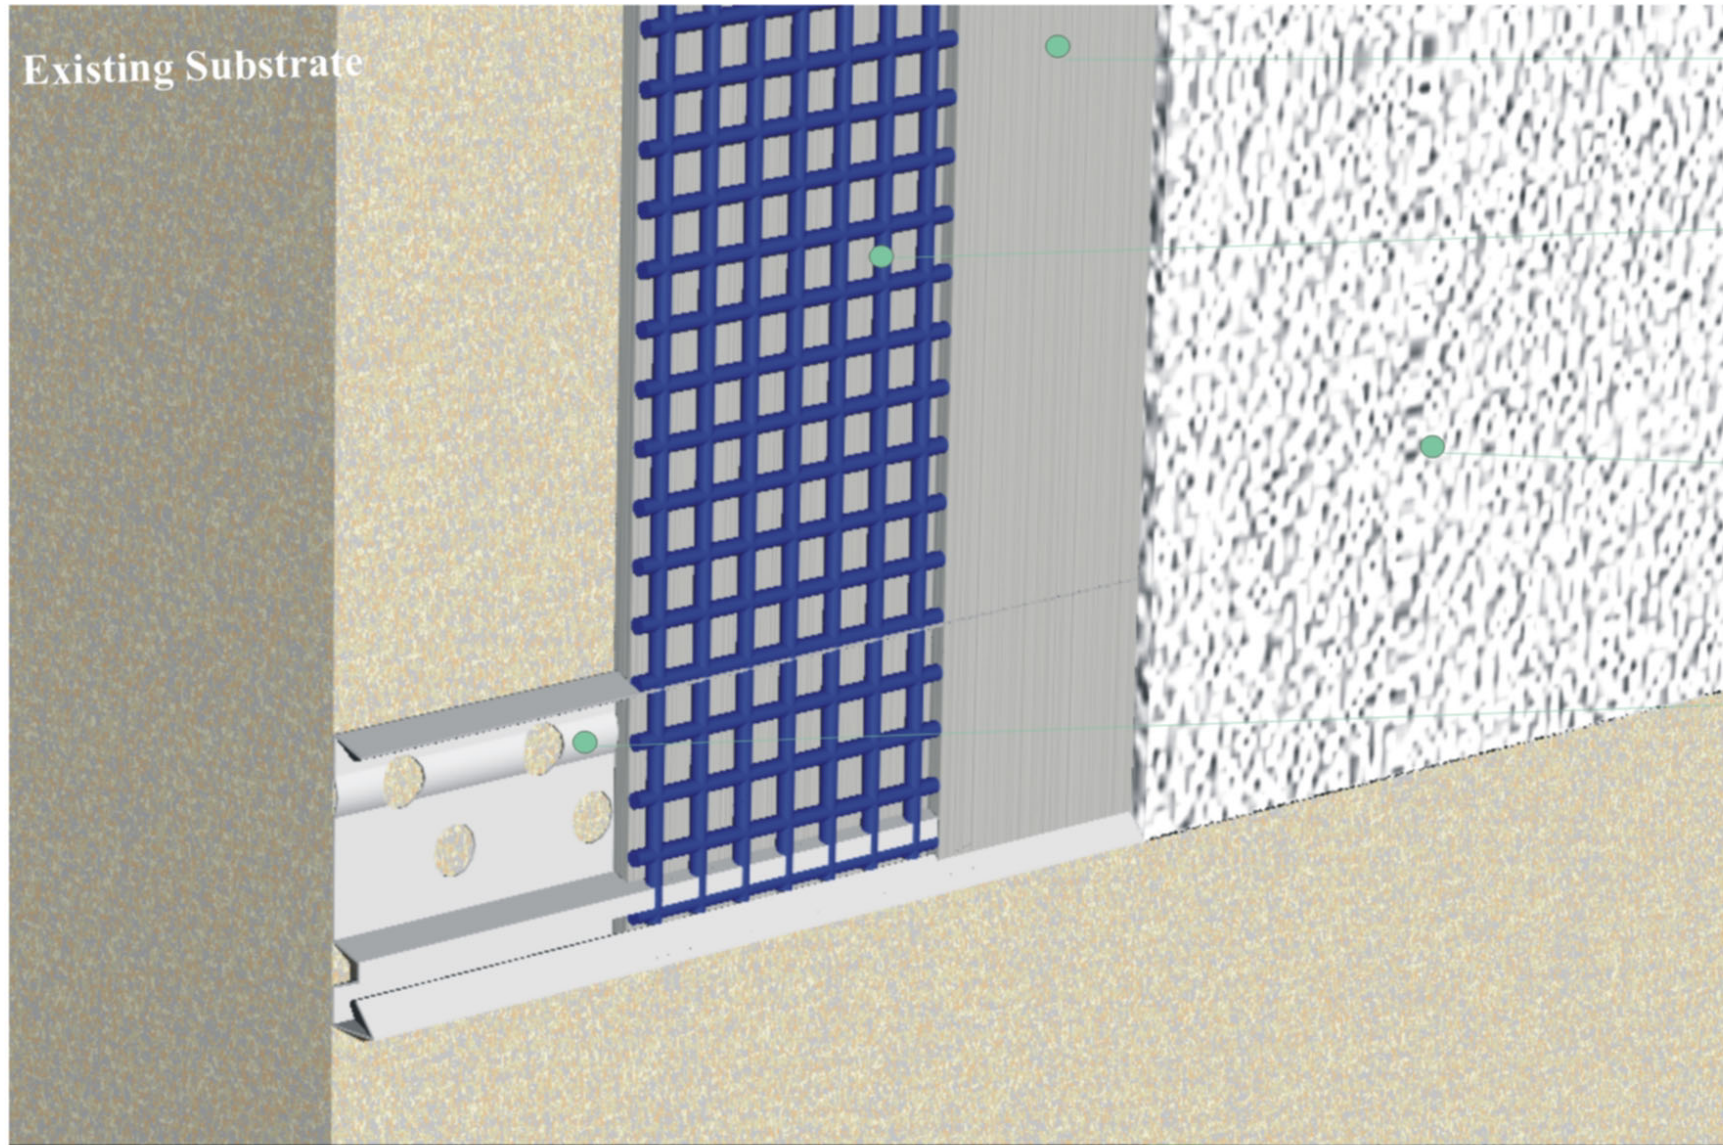

Base Coat.

3/4mm Envirowall G High Polymer Base Coat. Applied with 8mm tooth trowel.

Reinforcement Mesh.

Overlapped 100mm.
Extra Patches at doors and windows.
Mesh placed on surface of base coat for maximum reinforcement mesh.

Top Coat.

1.5mm grain acrylic finish. Trowel applied, thickness determined by grain size. Available in different textures. Silicone alternative available.

Starter Track.

Aluminum or stainless steel.
Fixed either using the adhesive base coat or with mechanical fixings . If necessary on uneven substrate packing shims should be used to ensure a true line. Unless otherwise stated the starter track should be positioned above th DPC.